




ApolloLED 2N

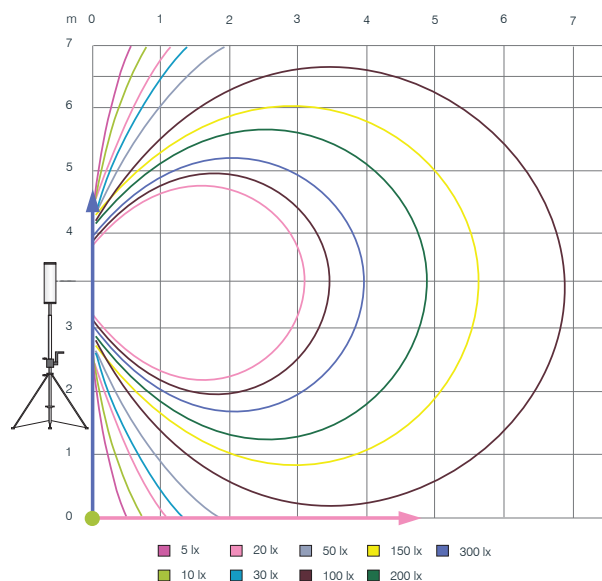


Technical data ApolloLED 2N

Diameter Ø mm:	208 mm
Length with suspension device:	900 mm
Weight light:	11 kg
Protection rating:	IP44
Protection class:	I
Mounting height:	3.5 m
Illumination area:	>700m ²
Luminaire:	896×0.5W
	SMD-LED
Light intensity:	53'760lm
Light efficiency:	122lm/W
Power consumption:	
– 50% illuminated:	220W
– 100% illuminated:	440W
Input voltage:	100-277VAC
Operating life lamp (env.):	>50'000h
Light color/light temperature:	5'000K
Temperature range (for use):	-25°C to +45°C

Features light

- light all around at higher light point
- glass guard is protectet by smaller diameter
- replacement of heat loss: The fan sucks the ambient air and generates an airflow through the lamp
- the air in- and outlet are at the bottom of the lamp
- switchable to 180° raditation

Dimensions light

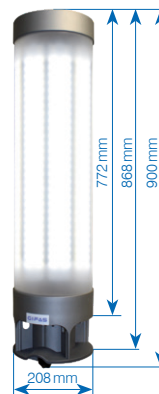

Technical data Case measurements

Is offered completely with flight case.	
Length:	1'180mm
Width:	280 mm
Height:	300 mm
Unladen weight:	8.6 kg

Technical data tripod

An appropriate tripod is required to ensure optimum handling.

Height min.:	1'670 mm
Height max.:	3'700 mm
Diameter of legs extended:	1'280 mm
Maximum load:	30 kg
Weight:	21.4 kg

Item no.	Designation
✓ 246988	ApolloLED 2N, 230V/896×0.5W, incl. power supply 5 m 3×1.5 mm ² , plug type 13, incl. transport case
✓ 800211	ApolloLED 2N, 230V/896×0.5W, excl. power supply and transport case

Accessories and Spare parts	
✓ 102009	Tripod, steel chromatised, h=max. 3.7 m, with crank winch, max load 30 kg, tube ø38 mm
✓ 800444	Power supply 5 m 3×1.5 mm ² , plug type 13
800445	Power supply 10 m 3×1.5 mm ² , plug type 13
✓ 330938	Transport case (Flight Case) black

✓ from stock, offer subject to prior sale